

AUF Series LED UV Flood Lamps

We manufacture highest quality of LED UV Products in accordance with international standards ASTM E1444 and ASTM E3022. The **AUF Series** of LED UV Flood Lamps are considered to be the benchmark in the NDT Industry. These Lamps are light weight, rugged and cost effective which makes them a perfect combination to be used for Fluorescent Inspection.

The most unique feature of **AUF Series** of LED UV Flood Lamps as that they all can be connected with each other on either side which means you can extend the length of coverage area to any extend depending on the requirement.



Salient Features

- Robust Aluminium Housing
- Inter Connected with Each Other
- Switchable between UV & White Light
- Electronic Intensity Control
- Long Lasting LED's (40,000 Hrs) Life
- Mechanical Active Cooling System with Fans
- Even Beam Profile Without Hotspots
- UV-A Pass Filter



AUF Series LED UV Flood Lamps

Technical Specifications

Parameters	AUF-350	AUF-500	AUF-1000
Light Source	8 UV-A LED/2 White LED	16 UV-A LED/4 White LED	32 UV-A LED/8 White LED
Max UV-A Intensity with filter at a distance of 15"(38cm)	6500 uw/cm ²	6500 uw/cm ²	6500 uw/cm ²
White Light Intensity	>3500 Lux/>325 ft-candle	>3500 Lux/>325 ft-candle	>3500 Lux/>325 ft candle
White Light Emission in UV mode	<10 Lux (0.92 fc)	<10 Lux (0.92 fc)	<10 Lux (0.92 fc)
Wavelength (Peak)	365 nm ± 5 nm	365 nm ± 5 nm	365 nm ± 5 nm
Max Beam Coverage Area	400mm x 270mm	600mm x 270mm	1100 mm x 270 mm
Intensity Control	From 10% - 100%	From 10% - 100%	From 10% - 100%
Power Requirement (AC Mains)	100V - 264V, 50-60Hz	100V - 264V, 50-60Hz	100V - 264V, 50-60Hz
Housing Material	Powder Coated Aluminium	Powder Coated Aluminium	Powder Coated Aluminium
Housing Dimensions	240x170x100 mm	485x170x100 mm	960x170x100 mm
Weight	4 Kg (8.8 lbs)	7.5 Kg (16.5 lbs)	15.5 Kg (34.1lbs)

Kit Contains:

- LED UV Flood Lamp
- Power Cord Cable
- Chains with Hooks
- Operation Manual & Certificate of Conformity


Order Part No.:

- AUF-350
- AUF-500
- AUF-1000

Note: Kindly Specify the Plug Type

Standard Warranty: 1 Year. For extended warranty please feel free to talk to sales team.

Beam Irradiance Pattern & Profile

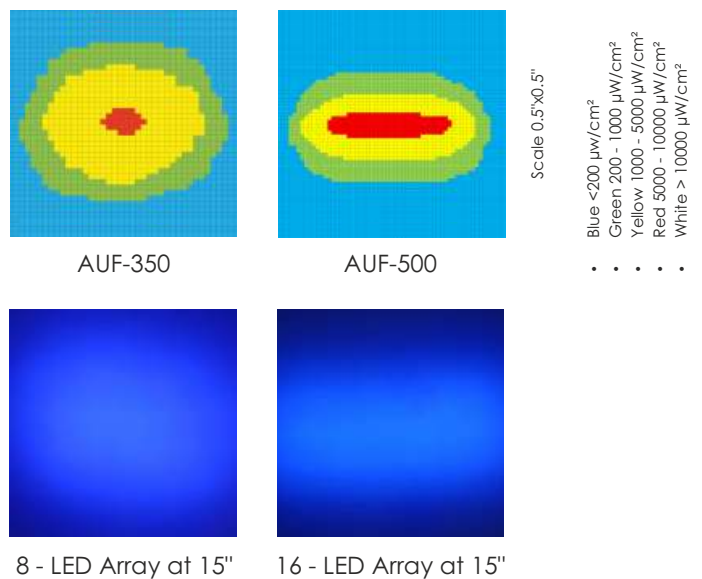

ARORA

Arora Technologies (P) Limited
 619 & 620 The Great Eastern Galleria, Plot No.20,
 Sector 4, Nerul, Navi Mumbai 400 706 India
 T: +91-22-6138 0600, 2770 3913/23, 2772 9077
 E: info@arorandt.com | W: www.arorandt.com



Authorised Reseller